



VALCO MELTON

PANEL WRAPPING

WOODWORKING ADHESIVE DISPENSING SOLUTIONS

Valco Melton's hot melt coating systems for panel wrapping have been engineered to meet even the most demanding needs of the woodworking, PVC and aluminum environments. From hot melt supply to coating at any application width, we offer a complete range of adhesive dispensing solutions to increase the production efficiency of your panel wrapping lines while minimizing adhesive usage, waste and downtime for an overall superior quality product.

Production advantages offered by Valco Melton's panel wrapping systems include:

- Prevent adhesive degradation, and minimize the waste and cleanup typically associated with roller application processes using our closed adhesive system.
- Decrease downtime and maintenance related costs.
- Apply EVA, PO or PUR hot melts.
- Ensure consistent glue volume at all speeds with an integrated, automatic line speed tracking system.
- Reduce adhesive usage.
- Decrease material waste with an approach band system that kicks-out when the machine stops, preventing burns and damage to the substrate.
- Reduce heat-up time with our unique grid melting systems.



Panel wrapping solutions for the woodworking, PVC and aluminum industries.



EDrum Unloaders

Designed for the application of any type of adhesive delivered in 200-liter drums, the EDrum Series unloaders are extremely versatile and include several customizable options to fit each user's specific requirements.

An integrated grammage control is accessible through a user-friendly screen and guarantees uniform coat weight throughout the entire board surface area.

EDrum unloaders can be used in tandem, or in combination with a buffer tank to eliminate refill downtime.



FlexWrapp Series Adjustable Applicators

FlexWrapp hot melt applicators offer adjustable coating width up to 1300 mm to cover all industry requirements.


Approach Band System ensures uniform contact of wrap against head and kicks-out when machine stops, preventing burns and damage on the substrate.

The standard FlexWrapp features an easy to use width regulation system—bilateral, independent, and with just one operational side. Motorized width regulation linked to grammage control is available as an option.




Guarantee consistent coat weight with motorized width regulation linked to grammage control.

Panel Wrapping System Layout

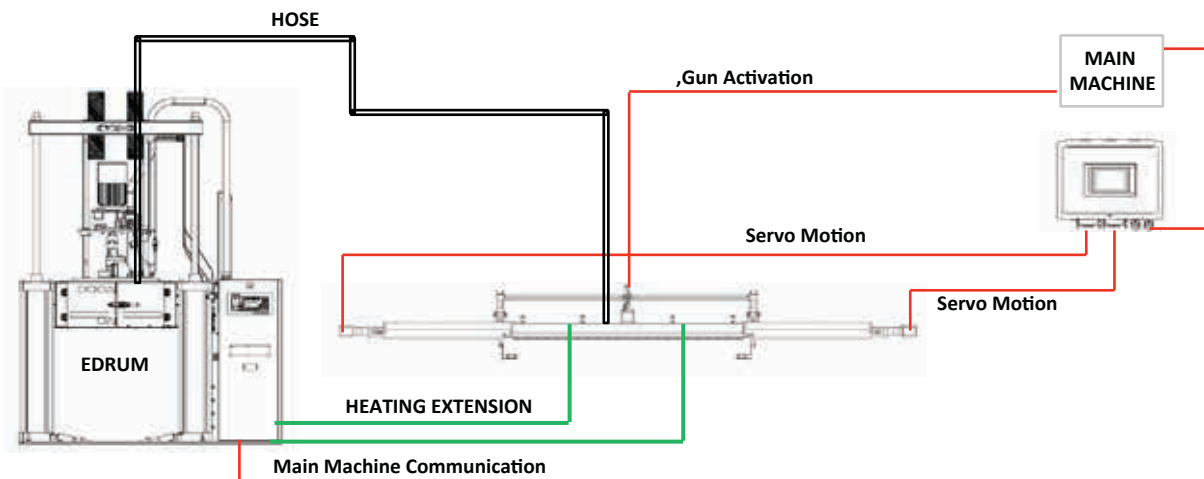

- Electrical Power Supply 230VAC
- Electrical Signals 24VDC
- Hose

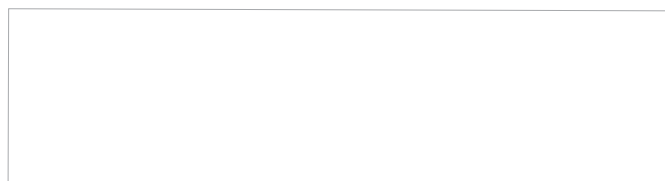

For more information, visit valcomelton.com or contact your local Valco Melton representative.
 World Headquarters: USA, Cincinnati, Ohio (Corporate Offices) • Tel:+1.513.874.6550 • Fax: +1.513.874.3612
 Europe Headquarters: Spain, Navarra • Tel:+34.948.321.580 • Fax:+34.948.326.584
 Asia Headquarters: China, Xiamen, Fujian • Tel:+86.592.591.7854 • Fax:+86.592.591.7834
inquiry@valcomelton.com • Serving over 76 Countries Worldwide • valcomelton.com