



VALCO MELTON


## PROFILE WRAPPING

### WOODWORKING ADHESIVE DISPENSING SOLUTIONS

Valco Melton's hot melt coating systems for profile wrapping have been engineered to meet even the most demanding needs of the woodworking, PVC and aluminum environments. From hot melt supply to coating at any application width, we offer a complete range of adhesive dispensing solutions to increase the production efficiency of your profile wrapping lines while minimizing adhesive usage, waste and downtime for an overall superior quality product.

#### Production advantages offered by Valco Melton's profile wrapping systems include:

- Prevent adhesive degradation, and minimize the waste and cleanup typically associated with roller application processes using our closed adhesive system.
- Decrease downtime and maintenance related costs.
- Apply EVA, PO or PUR hot melts.
- Reduce adhesive usage while ensuring consistent glue volume at all speeds with our integrated grammage control.
- Reduce heat-up time with our unique grid melting systems.

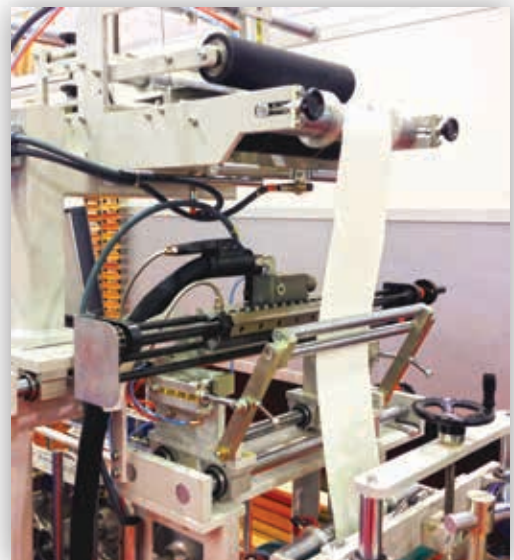

*Approach Band System kicks-out when the machine stops, preventing burns and damage to the substrate.*



#### IsoMelt Series Melter

IsoMelt universal melters can work with an extensive range of hot melts including PUR, PO and EVA.

The new EasyClean system features a tiltable tank and removable melting grid for faster and safer maintenance operations.

To prevent adhesive degradation, IsoMelt units include a hermetic tank lid, an air dryer and a PLC atmosphere control. Featuring a 40L round tank with swiveling tank lid, IsoMelt is ideal for working with 20kg PUR standard bag sizes.


## FlexWrapp Series Adjustable Applicators

FlexWrapp hot melt applicators offer adjustable coating width up to 1300 mm to cover all industry requirements.


Approach Band System ensures uniform contact of wrap against head and kicks-out when machine stops, preventing burns and damage on the substrate.

The standard FlexWrapp features an easy to use width regulation system—bilateral, independent, and with just one operational side.

Motorized width regulation linked to grammage control is available as an option.

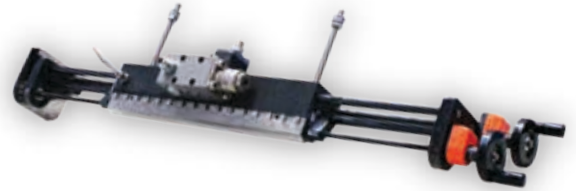

### Profile Wrapping System Layout

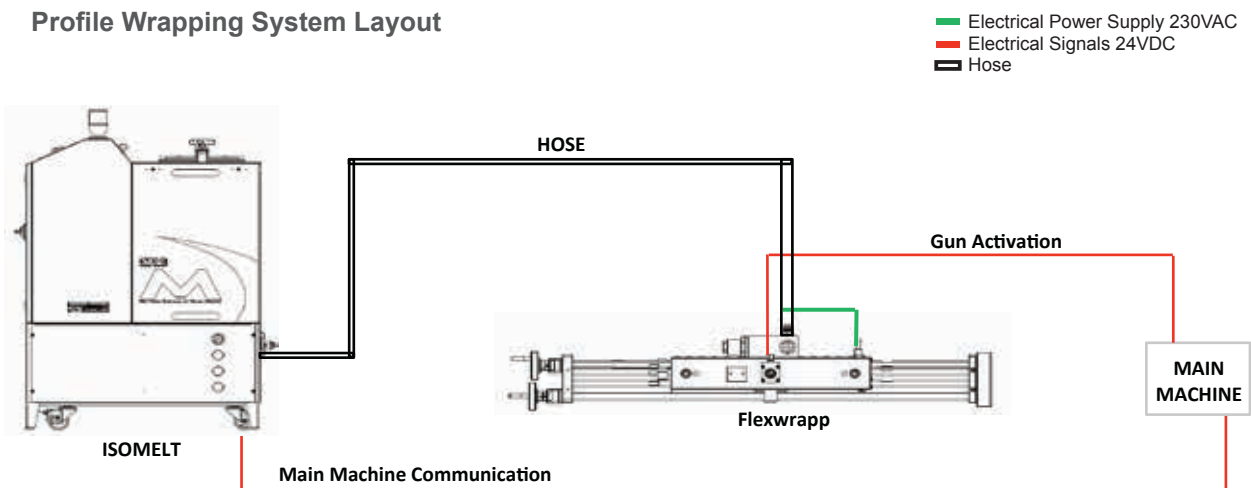

For more information, visit [valcomelton.com](http://valcomelton.com) or contact your local Valco Melton representative.  
 World Headquarters: USA, Cincinnati, Ohio (Corporate Offices) • Tel:+1.513.874.6550 • Fax: +1.513.874.3612  
 Europe Headquarters: Spain, Navarra • Tel:+34.948.321.580 • Fax:+34.948.326.584  
 Asia Headquarters: China, Xiamen, Fujian • Tel:+86.592.591.7854 • Fax:+86.592.591.7834  
[inquiry@valcomelton.com](mailto:inquiry@valcomelton.com) • Serving over 76 Countries Worldwide • [valcomelton.com](http://valcomelton.com)