



## BPAIL SERIES

### 20L Pail Unloader

Valco Melton's BPail Series Melters are specially designed for the application of PUR adhesive delivered in 20 Liter pails. Each BPail Unit includes a flat or finned platen to achieve different melt rates and optional add-on safety features.


- Safer working environment with new platen protection system and fume exhaust hood in option
- Reduced downtime related with drum changes
- A wide range of options permit customization to specific user needs




The integrated grammage control, accessible through a multi-function controller, simplifies operator's programming tasks to eliminate product loss and downtime associated with incorrect coat weight adjustments.




Platen Protection System in option protects operator from burns and trappings.

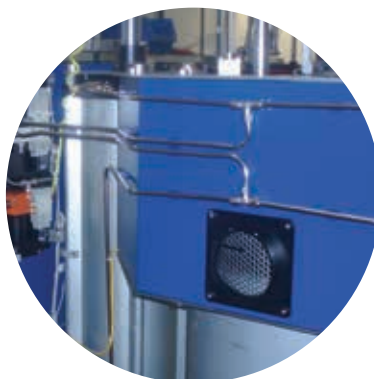

Optional fume exhaust hood for easy connection with ventilation tube.

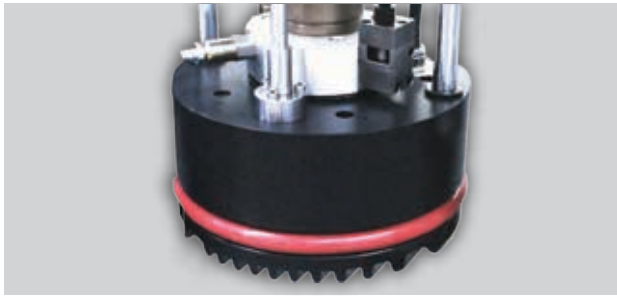

Finned or flat platens better adapt to various adhesive types. All platens are Teflon® coated and include cast-in heaters.

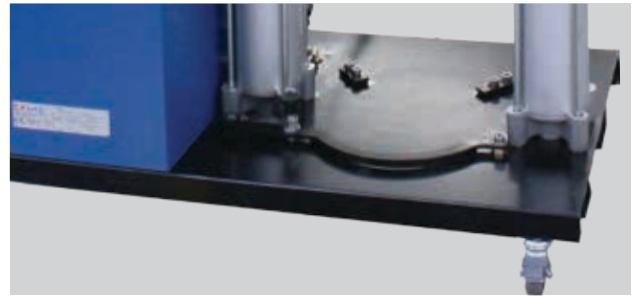

Integrates a new pail fastening system for faster drum changes.

A COMPLETE SELECTION OF HOT MELT COMPONENTS AND SUPPORT EQUIPMENT


- RTD hot melt hoses
- Manual and automatic dispensing valves
- Nozzle and applicator styles
- Mounting bracket packages
- Solid-state pattern control systems
- In-line filters
- Replacement parts for competitive systems

### Technical Specifications

BPail Characteristics		
System	20L flat platen	20L finned platen
Capacity (L)	20	20
Max. Melting Capacity (Kg/h)	8 (*)	25 (*)
Max. Pumping Rate (Kg/h)	48	48
Max. Number of Pumps	1	1
Working Temperature	30 -240°C	
Max. Working Viscosity (cps)	100,000 cps	
Max. Working Pressure (cps)	100 bar	
Electrical Consumption (Kw)	8 Kw	

(\*) Melt rate may vary depending on specific adhesive type

4 Output Electronic Board		
Max. channel power	Channel 1 / Channel 2	Channel 3 / Channel 4
Per channel (hose and gun)	2000W	1400W

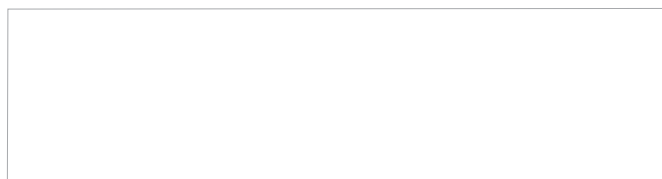

For more information, visit [valcomelton.com](http://valcomelton.com) or contact your local Valco Melton representative.

World Headquarters: USA, Cincinnati, Ohio (Corporate Offices) • Tel:+1.513.874.6550 • Fax: +1.513.874.3612

Europe Headquarters: Spain, Navarra • Tel:+34.948.321.580 • Fax:+34.948.326.584

Asia Headquarters: China, Xiamen, Fujian • Tel:+86.592.591.7854 • Fax:+86.592.591.7834

[inquiry@valcomelton.com](mailto:inquiry@valcomelton.com) • Serving over 76 Countries Worldwide • [valcomelton.com](http://valcomelton.com)