


FLEXWRAPP

Adjustable Coating Width up to 1300 mm

For continuous applications that require frequent width changes and maximum precision to reduce adhesive usage, the FlexWrapp Coating Gun Series is the ideal choice. The latest FlexWrapp series offers enhanced reliability and has been specifically engineered to meet the demanding needs of the woodworking, PVC and aluminium environments.

Key Features:

- Coating width can be easily adjusted up to 1300 mm
- Maximum durability for minimized labor and maintenance costs
- Optional Teflon® coating prevents build-up for an easy-to-clean surface

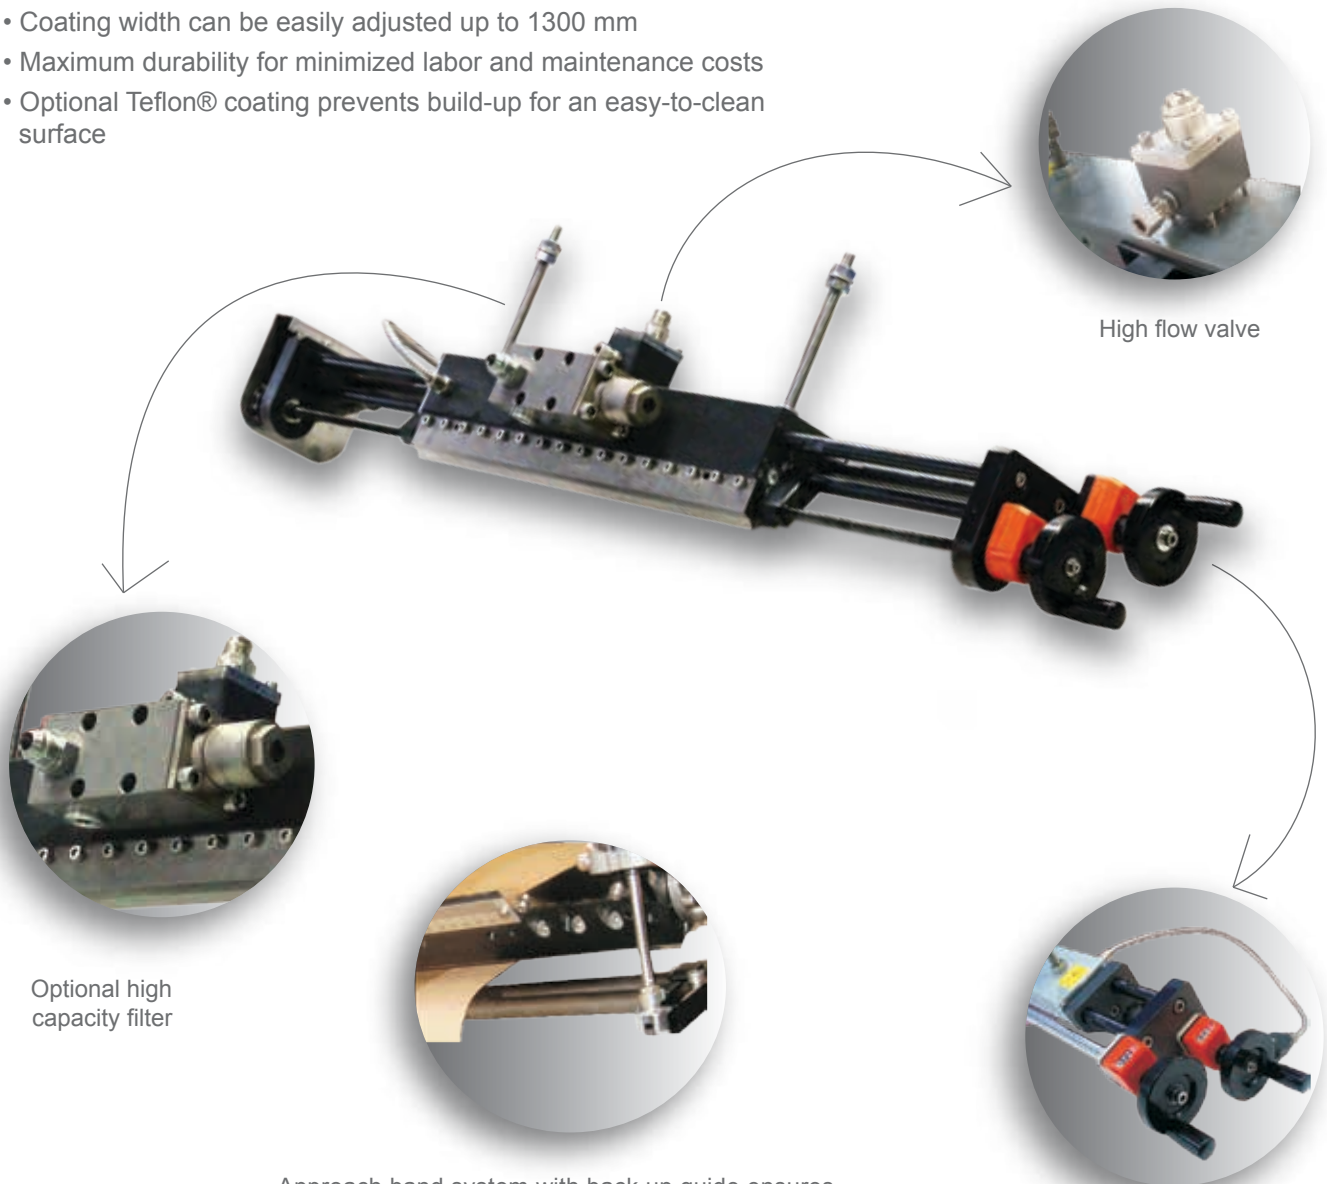

High flow valve

Optional high capacity filter

Approach band system with back up guide ensures uniform contact of the wrap against the coating head and moves out when the machine stops to prevent burns and damage on the substrate.

Easy to use width adjustment system, bilateral, independent, and with just one operational side



Precise adjustments allow Valco Melton's FlexWrapp Series to offer a higher quality application, making it ideal for use in woodworking, PVC and aluminum profile wrapping applications.

A range of system functions including automatic application width and grammage control can be accessed through a touch screen panel, simplifying the operator's programming tasks, and eliminating product loss and downtime associated with incorrect coat weight adjustments.

All FlexWrapp series are equipped with independent right and left regulation (manual or with stepper motors) and width adjustments from 350 mm up to 1300 mm.


Automatic adjustable width through independent stepper motors



Manual regulation with one operational side



Bilateral manual width regulation

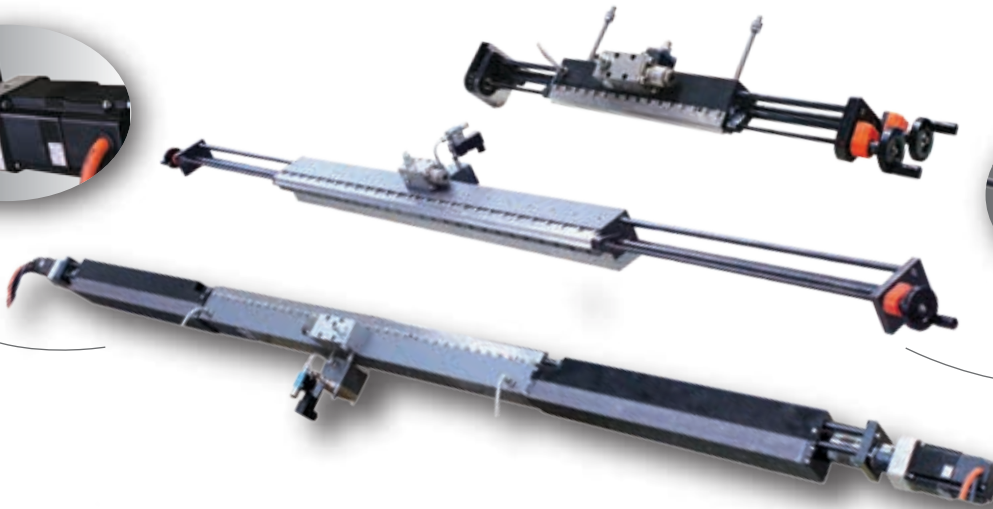

Technical Specifications

Specifications	
Maximum Coating Length	350 550 850 1100 1300 *
Max. Operating Speed	70 m/min
Add-On	30 to 130 gsm
Temperature Control	PT - 100/ NI - 120/ FEKO
Maximum Operating Temperature	240°C
Maximum Operating Pressure	100 bar
Features	Motorized width linked to grammage control.



For more information, visit <http://delivr.com/2h8ck> or contact your local Valco Melton representative.

World Headquarters: USA, Cincinnati, Ohio (Corporate Offices) • Tel:+1.513.874.6550 • Fax: +1.513.874.3612

Europe Headquarters: Spain, Navarra • Tel:+34.948.321.580 • Fax:+34.948.326.584

Asia Headquarters: China, Xiamen, Fujian • Tel:+86.592.591.7854 • Fax:+86.592.591.7834
inquiry@valcomelton.com • Serving over 76 Countries Worldwide • valcomelton.com